



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_



### Specifications

**Material:**  
RLM shades are constructed of heavy duty spun aluminum. Wall back plate and ballast housing are cast aluminum. All fasteners are stainless steel. Inside of shade is reflective white finish for all colors except galvanized paint finish. Screw hardware may not match paint.

**Glass:**  
Choice of clear, frosted or prismatic glass.

**Ballasts:**  
Fluorescent Ballast will be electronic. Fluorescent sockets will be 4 pin to accept quad or triple tube lamps.

**Electrical:**  
4-Pin Socket; Multi-tap 120v, 208v, 240v & 277v.

**Finish:**  
A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

**Certifications:**  
Cord mounts are UL Listed for dry locations. Arm mount, stem mount and wall mount are UL Listed for wet locations.

**Modifications:**  
Consult factory for custom or modified luminaires.

**A814**  
CFL

Weight: 1.5 lbs

#### Catalog Logic



Catalog Number	1	2	3	4	5	6	7
<b>A814</b>	<b>42WPL</b>	<b>RTC</b>	<b>E6</b>	<b>200GLFRGUP</b>			

1	LIGHT SOURCE & WATTAGES
	Flourescent (CFL)
	GU24 Socket Option
	26WPL
	32WPL
	<b>42WPL</b> (100GL or AC glass not available)
	26CFLDIM
	32CFLDIM
	42CFLDIM (100GL or AC glass not available)
	(Compact Fluorescent dimming is 0-10v and ballast must be located within 12" of lamp)

2	BALLAST HOUSING
	Flourescent (CFL)
	<b>RTC</b> (CFL Ballast Canopy)
	RTCNC (CFL Ballast Canopy/No Spun Cover)
	DBH (Dimming CFL Ballast Housing)

3	MOUNTING SOURCES
	Arm Mounts (Cast Back Plate (CB) Included)
	E3 E4 <b>E6</b> E7 E8
	E10 E11 E12 E18 E25
	(See Step 2 for Ballast Housing Options)
	Wall Mounts
	WM54
	WM317 (CFL Only)
	Stem Mounts
	1/2" (13/16" OD Rigid Stems with STC Flat Canopy)
	2ST6 2ST12 2ST18 2ST24 2ST36 2ST48
	2ST60 2ST72 2ST96
	3/4" (1" OD Rigid Stems with STC Flat Canopy)
	3ST6 3ST12 3ST18 3ST24 3ST36 3ST48
	3ST60 3ST72 3ST96
	(See Step 2 for Ballast Housing Options)

4	GLASS & GUARD
	<b>Up to 100w Options</b>
	100GLCL (Clear Glass)
	100GLFR (Frosted Glass)
	100GLPR (Prismatic Glass)
	100GLCLGUP (Clear Glass & Small Wire Guard)
	100GLFRGUP (Frosted Glass & Small Wire Guard)
	100GLPRGUP (Prismatic Glass & Small Wire Guard)
	100GLCLGUPC (Clear Glass & Cast Guard)
	100GLFRGUPC (Frosted Glass & Cast Guard)
	100GLPRGUPC (Prismatic Glass & Cast Guard)
	100GLGUP (Small Wire Guard with No Glass)
	100GLGUPC (Cast Guard with No Glass)
	AC (Stipple Glass Acorn)
	100GLBG (White Ball Glass)
	<b>Up to 200w Options</b>
	200GLCL (Clear Glass)
	200GLFR (Frosted Glass)
	200GLPR (Prismatic Glass)
	200GLCLGUP (Clear Glass & Large Wire Guard)
	<b>200GLFRGUP</b> (Frosted Glass & Large Wire Guard)
	200GLPRGUP (Prismatic Glass & Large Wire Guard)
	200GLCLGUPC (Clear Glass & Large Cast Guard)
	200GLFRGUPC (Frosted Glass & Large Cast Guard)
	200GLPRGUPC (Prismatic Glass & Large Cast Guard)
	200GLGUP (Large Wire Guard with No Glass)
	200GLGUPC (Large Cast Guard with No Glass)

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

5 ACCESSORIES	
<b>CBC</b>	(Cast back plate Spun Alum Cover)
<b>EMG-CFL</b>	(CFL Emergency Ballast, remote placement)
<b>GR20</b>	(20" Wire Grill)
<b>PC</b>	(Button Photo Cell) Remote Only
<b>SC</b>	(Scroll for Arms)
<b>SLC</b>	(Sloped Ceiling Mount, 20° Max)
<b>SQ</b>	(Square Back Plate)
<b>SWL</b>	(Swivel)
<b>TBK</b>	(Turnbuckle Kit)

6 VOLTAGES			
<b>120</b>	<b>208</b>	<b>240</b>	<b>277</b>
WARRANTY			
See <a href="http://www.anplighting.com">www.anplighting.com</a> for complete fixture warranty.			

7 FINISHES					
<u>Standard Grade</u>	<u>Marine Grade</u>		<u>Standard Grade</u>	<u>Marine Grade</u>	
40	NA	Raw Unfinished	53	100	Copper Clay
41	101	Black	56	109	Silver
42	102	Forest Green	61	106	Black Verde
43	114	Bright Red	70	118	Painted Chrome
44	107	White	71	105	Painted Copper
45	112	Bright Blue	72	108	Textured Black
46	123	Sunny Yellow	73	125	Matte Black
47	120	Aqua Green	76	121	Textured Architectural Bronze
49	NA	Galvanized	77	127	Textured White
50	111	Navy	78	124	Textured Silver
51	103	Architectural Bronze	10	130	Aspen Green
52	104	Patina Verde	11	131	Cantaloupe
12	133	Lilac	13	132	Putty
<u>Premium Grade</u>	<u>Marine Grade</u>		<u>Premium Grade</u>	<u>Marine Grade</u>	
81	129	Extreme Chrome	64	116	Candy Apple Red
80	117	Textured Desert Stone	65	122	Cobalt Blue
67	119	Butterscotch	82	128	Graystone
66	115	Caramel	69	113	Gunmetal Gray
68	126	Black Silver	83	134	Oil Rubbed Bronze

Consult factory for additional paint charges and availability

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_


**ARM MOUNTS** | Dimensions are Projection x Height | CB included with all arms



**WALL MOUNTS** | Dimensions are Projection x Height



**ACCESSORIES**

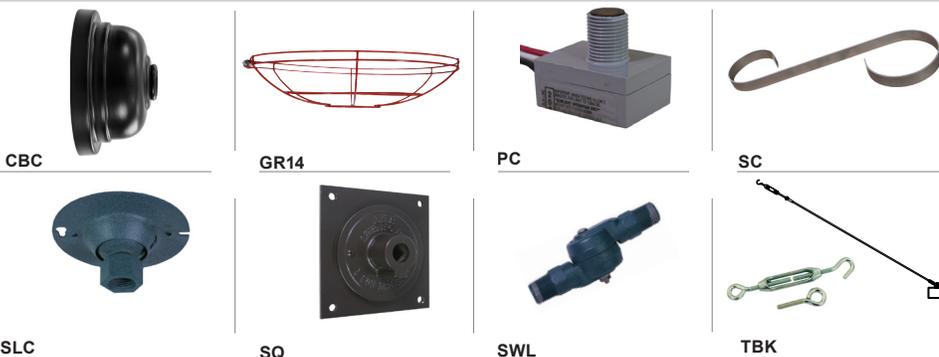

**GLASS & GUARDS**

Glass Legend: CL = Clear FR = Frosted PR = Prismatic	
<b>Glass Only</b>	
	GLCL GLFR GLPR
	AC (Acorn Glass -- Clear Stipple Only)
	GLBG (Ball Glass -- White Only)
<b>Glass with Cast Guard</b>	
	GLCLGUPC GLFRGUPC GLPRGUPC
<b>Glass with Wire Guard</b>	
	GLCLGUP GLFRGUP GLPRGUP
<b>Guards Only</b>	
	GLGUPC (Cast Guard)
	GLGUP (Wire Guard)
<b>Ballast &amp; Driver Housing</b>	
	RTC
	RTCNC
	DBH