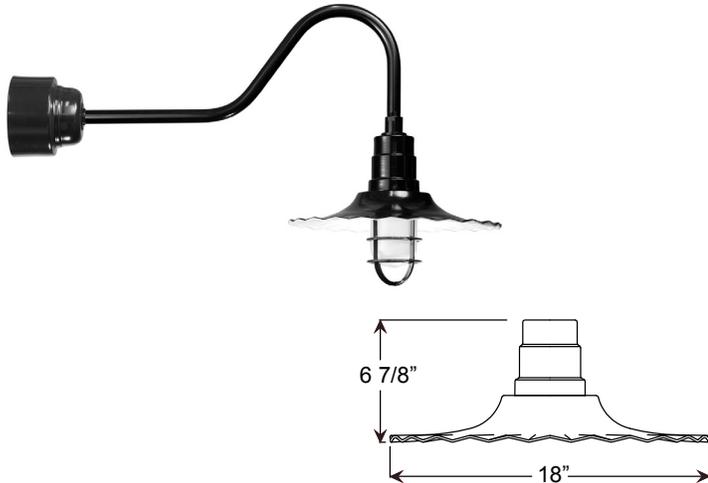


Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____



Specifications

Material:
RLM shades are constructed of heavy duty spun aluminum. Wall back plate and ballast housing are cast aluminum. All fasteners are stainless steel. Inside of shade is reflective white finish for all colors except galvanized paint finish. Screw hardware may not match paint.

Glass:
Choice of clear, frosted or prismatic glass.

Ballasts:
Fluorescent Ballast will be electronic. Fluorescent sockets will be 4 pin to accept quad or triple tube lamps.

Electrical:
4-Pin Socket; Multi-tap 120v, 208v, 240v & 277v.

Finish:
A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

Certifications:
Cord mounts are UL Listed for dry locations. Arm mount, stem mount and wall mount are UL Listed for wet locations.

Modifications:
Consult factory for custom or modified luminaires.



illuminating
ENGINEERING SOCIETY

R918
CFL

Weight: 2 lbs

Catalog Logic



Catalog Number	1	2	3	4	5	6	7
R918	42WPL	RTC	E6	200GLCLGUP			

1 LIGHT SOURCE & WATTAGES
Flourescent (CFL)
GU24 Socket Option
26WPL
32WPL
42WPL (100GL or AC glass not available)
26CFLDIM
32CFLDIM
42CFLDIM (100GL or AC glass not available)
(Compact Fluorescent dimming is 0-10v and ballast must be located within 12" of lamp)

2 BALLAST HOUSING
Flourescent (CFL)
RTC (CFL Ballast Canopy)
RTCNC (CFL Ballast Canopy/No Spun Cover)
DBH (Dimming CFL Ballast Housing)

3 MOUNTING SOURCES
Arm Mounts (Cast Back Plate (CB) Included)
E3 E4 E5 E6 E8 E9
E10 E11 E12 E13 E18
E19 E25
(See Step 2 for Ballast Housing Options)
Wall Mounts
WM40
WM54
WM74 (CFL Only)
WM75 (HID Only)
WM317 (CFL Only)
WM84
Post Mounts (Postline ballast only; 4" OD pole required))
PM10
PM20
PM30
PM40
PM50
PM319
Cord Mounts
BLC (6' black cord with 1" x 5 3/8" canopy)
WHC (6' white cord with 1" x 5 3/8" canopy)
Stem Mounts
1/2" (13/16" OD Rigid Stems with STC Flat Canopy)
2ST6 2ST12 2ST18 2ST24 2ST36 2ST48
2ST60 2ST72 2ST96
3/4" (1" OD Rigid Stems with STC Flat Canopy)
3ST6 3ST12 3ST18 3ST24 3ST36 3ST48
3ST60 3ST72 3ST96
(See Step 2 for Ballast Housing Options)

4 GLASS & GUARD
Up to 100w Options
100GLCL (Clear Glass)
100GLFR (Frosted Glass)
100GLPR (Prismatic Glass)
100GLCLGUP (Clear Glass & Small Wire Guard)
100GLFRGUP (Frosted Glass & Small Wire Guard)
100GLPRGUP (Prismatic Glass & Small Wire Guard)
100GLCLGUPC (Clear Glass & Cast Guard)
100GLFRGUPC (Frosted Glass & Cast Guard)
100GLPRGUPC (Prismatic Glass & Cast Guard)
100GLGUP (Small Wire Guard with No Glass)
100GLGUPC (Cast Guard with No Glass)
AC (Stipple Glass Acorn)
100GLBG (White Ball Glass)
Up to 200w Options
200GLCL (Clear Glass)
200GLFR (Frosted Glass)
200GLPR (Prismatic Glass)
200GLCLGUP (Clear Glass & Large Wire Guard)
200GLFRGUP (Frosted Glass & Large Wire Guard)
200GLPRGUP (Prismatic Glass & Large Wire Guard)
200GLCLGUPC (Clear Glass & Large Cast Guard)
200GLFRGUPC (Frosted Glass & Large Cast Guard)
200GLPRGUPC (Prismatic Glass & Large Cast Guard)
200GLGUP (Large Wire Guard with No Glass)
200GLGUPC (Large Cast Guard with No Glass)

Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____

5 ACCESSORIES	
CBC	(Cast back plate Spun Alum Cover)
PC	(Button Photo Cell) Remote Only
SC	(Scroll for Arms)
SLC	(Sloped Ceiling Mount, 20° Max)
SQ	(Square Back Plate)
SWL	(Swivel)
TBK	(Turnbuckle Kit)

6 VOLTAGES			
120	208	240	277

WARRANTY

See www.anplighting.com for complete fixture warranty.

7 FINISHES							
Standard Grade		Marine Grade		Standard Grade		Marine Grade	
40	NA	Raw Unfinished	53	100	Copper Clay		
41	101	Black	56	109	Silver		
42	102	Forest Green	61	106	Black Verde		
43	114	Bright Red	70	118	Painted Chrome		
44	107	White	71	105	Painted Copper		
45	112	Bright Blue	72	108	Textured Black		
46	123	Sunny Yellow	73	125	Matte Black		
47	120	Aqua Green	76	121	Textured Architectural Bronze		
49	NA	Galvanized	77	127	Textured White		
50	111	Navy	78	124	Textured Silver		
51	103	Architectural Bronze	10	130	Aspen Green		
52	104	Patina Verde	11	131	Cantaloupe		
12	133	Lilac	13	132	Putty		
Premium Grade		Marine Grade		Premium Grade		Marine Grade	
81	129	Extreme Chrome	64	116	Candy Apple Red		
80	117	Textured Desert Stone	65	122	Cobalt Blue		
67	119	Butterscotch	82	128	Graystone		
66	115	Caramel	69	113	Gunmetal Gray		
68	126	Black Silver	83	134	Oil Rubbed Bronze		


Consult factory for additional paint charges and availability

Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____


ARM MOUNTS | Dimensions are Projection x Height | CB included with all arms

 E3 32" x 11 7/8"	 E4 26" x 14"	 E5 37" x 16 1/2"	 E6 26" x 9 1/4"
 E8 29 1/4" x 12 1/2"	 E9 28" x 40 5/8"	 E10 52 1/4" x 18"	 E11 35 1/4" x 17 1/4"
 E12 37 3/8" x 2"	 E13 34" x 34 3/8"	 E18 27 3/4" x 21 3/8"	 E19 22 3/4" x 95 1/8"
 E25 23" x 5 1/4"			

WALL MOUNTS | Dimensions are Projection x Height | **POST MOUNTS** | Dimensions are Projection x Height

 WM40 13 7/8" x 14 3/4"	 WM54 23 3/8" x 14 1/4"	 PM10 14 1/2" x 25"	 PM20 30 1/8" x 25"
 WM74 22" x 26 1/2" (CFL Only)	 WM75 25" x 26 1/2" (HID Only)	 PM30 21 5/8" x 28 7/8"	 PM40 43 3/8" x 28 7/8"
 WM84 26 1/2" x 57 1/4"	 WM317 15" x 12" (CFL Only)	 PM50 27" x 38"	 PM319 16 5/8" x 27 1/2"

ACCESSORIES

 CBC	 PC	 SC	 SLC
 SQ	 SWL	 TBK	

GLASS & GUARDS

Glass Legend: CL = Clear FR = Frosted PR = Prismatic

Glass Only	
	GLCL GLFR GLPR
	AC (Acorn Glass -- Clear Stipple Only)
	GLBG (Ball Glass -- White Only)
Glass with Cast Guard	
	GLCLGUPC GLFRGUPC GLPRGUPC
Glass with Wire Guard	
	GLCLGUP GLFRGUP GLPRGUP
Guards Only	
	GLGUPC (Cast Guard)
	GLGUP (Wire Guard)
Ballast & Driver Housing	
	RTC
	RTCNC
	DBH