


Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_



**Weight:** 2.5 lbs.  
**BUG:** B1-U0-G1

### Specifications

**Material:**  
RLM shades are constructed of heavy duty spun aluminum. Wall back plate and ballast housing are cast aluminum. All fasteners are stainless steel. Inside of shade is reflective white finish for all colors except galvanized paint finish. Screw hardware may not match paint.

**Glass:**  
Choice of clear, frosted or prismatic glass.

**Electrical:**  
Medium Base Socket, 300w Maximum.

**Certifications:**  
Cord mounts are UL Listed for dry locations. Arm mount, stem mount and wall mount are UL Listed for wet locations.

**Finish:**  
A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

**Modifications:**  
Consult factory for custom or modified luminaires.



Catalog Logic

**W520** - **E6** - **N.A.** - **GR16** - **41**

RLM Style      Mounting Source      Glass & Guards      Accessories      Finish

## W520 300w max Incandescent

### Catalog Number

**W520**

**E6**

**N.A.**

### 1 MOUNTING SOURCES

Arm Mounts (Cast back plate included)

- E3 E4 E5 **E6** E7
- E8 E9 E10 E11 E12
- E13 E18 E19 E25

#### Wall Mounts

- WM10
- WM35
- WM55
- WM318

#### Post Mounts

- PM10
- PM20
- PM30
- PM40
- PM50
- PM319

#### Cord Mounts

- BLC (8' black cord with 1" x 5 3/8" canopy)
- WHC (8' white cord with 1" x 5 3/8" canopy)

#### Stem Mounts

- 1/2" (13/16" OD Rigid Stems with STC Flat Canopy)
- 2ST6 2ST12 2ST18 2ST24 2ST36 2ST48
- 2ST60 2ST72 2ST96
- 3/4" (1" OD Rigid Stems with STC Flat Canopy)
- 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48
- 3ST60 3ST72 3ST96

### WARRANTY

See [www.anplighting.com](http://www.anplighting.com) for complete fixture warranty.

### 2 GLASS & GUARD

#### Up to 100w Options

- 100GLCL (Clear Glass)
- 100GLFR (Frosted Glass)
- 100GLPR (Prismatic Glass)
- 100GLCLGUP (Clear Glass & Small Wire Guard)
- 100GLFRGUP (Frosted Glass & Small Wire Guard)
- 100GLPRGUP (Prismatic Glass & Small Wire Guard)
- 100GLCLGUPC (Clear Glass & Cast Guard)
- 100GLFRGUPC (Frosted Glass & Cast Guard)
- 100GLPRGUPC (Prismatic Glass & Cast Guard)

- 100GLGUP (Small Wire Guard with No Glass)
- 100GLGUPC (Cast Guard with No Glass)

AC (Stipple Glass Acorn)

100GLBG (White Ball Glass)

#### Up to 200w Options

- 200GLCL (Clear Glass)
- 200GLFR (Frosted Glass)
- 200GLPR (Prismatic Glass)
- 200GLCLGUP (Clear Glass & Large Wire Guard)
- 200GLFRGUP (Frosted Glass & Large Wire Guard)
- 200GLPRGUP (Prismatic Glass & Large Wire Guard)
- 200GLCLGUPC (Clear Glass & Large Cast Guard)
- 200GLFRGUPC (Frosted Glass & Large Cast Guard)
- 200GLPRGUPC (Prismatic Glass & Large Cast Guard)

200GLGUP (Large Wire Guard with No Glass)

200GLGUPC (Large Cast Guard with No Glass)

### 3 ACCESSORIES

- CBC** (Cast back plate Spun Alum Cover)
- GR16** (16" Wire Grill)
- PC** (Button Photo Cell) Remote Only
- SC** (Scroll for Arms)
- SLC** (Sloped Ceiling Mount, 20° Max)
- SQ** (Square Back Plate)
- SWL** (Swivel)
- TBK** (Turnbuckle Kit)

### 4 FINISHES

Standard Grade	Marine Grade	Standard Grade	Marine Grade
40	NA	53	100
41	101	56	109
42	102	61	106
43	114	70	118
44	107	71	105
45	112	72	108
46	123	73	125
47	120	76	121
49	NA	77	127
50	111	78	124
51	103	10	130
52	104	11	131
12	133	13	132

Premium Grade	Marine Grade	Premium Grade	Marine Grade
81	129	64	116
80	117	65	122
67	119	82	128
66	115	69	113
68	126	83	134

Consult factory for additional paint charges and availability

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

**ARM MOUNTS** | Dimensions are Projection x Height | CB included with all arms



**WALL MOUNTS** | Dimensions are Projection x Height




**POST MOUNTS** | Dimensions are Projection x Height



**GLASS & GUARDS**

Glass Legend: **CL** = Clear **FR** = Frosted **PR** = Prismatic


**Glass Only**

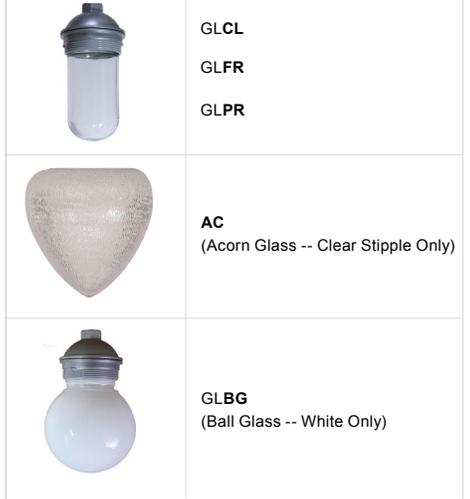

**Glass with Cast Guard**



**Glass with Wire Guard**

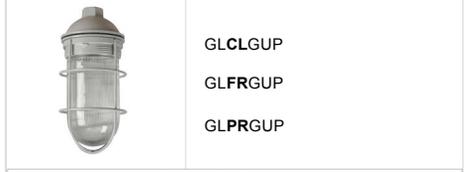

**Guards Only**



**ACCESSORIES**

